




55402203 HANSABASIC - Washbasin faucet

EAN: 4057304018985 static.hansa.com/55402203

Timeless choice for every modern bathroom. Introducing the universal HANSABASIC washbasin faucet. With a chrome finish and single operating lever, this deck-mounted faucet adds a modern touch to any washbasin. The fixed spout with hot and cold symbols are made for effortless use, while the rapid installation system ensures quick and easy installation. It comes with a classic design and very good price performance. Choose the BASIC line for daily enjoyment in everyday use.

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system






K> HANSA

Technical data

Flow properties

| Flow-rate at 3 bar (with flow controller) | 4.8 l/min |
|---|----------------|
| Technical properties | |
| DN-size (nominal dimension) | DN15 |
| Hot water supply | max. +70°C |
| Working pressure | 0.5-10 bar |
| Connection size | G3/8 |
| Projection | 101 mm |
| Backflow prevention (EN1717) | AA |
| Material | Brass |
| Regulations | |
| EN standard | EN 817 |
| Noise class | l (ISO 3822) |
| Approvals and Declarations | |
| DVGW | DW-6506DO0165 |
| ABP | PA-IX 10072/IO |
| Declaration of conformity | DoC |

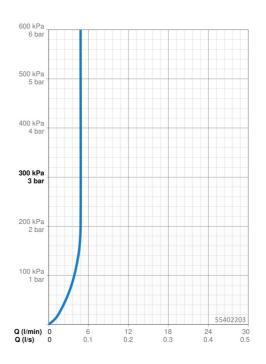

Spare parts



SP55402203

| | Name | Code |
|----|-------------------------|----------|
| 01 | Lever | 1017126V |
| 02 | Covering cap | 1017127V |
| 03 | Cartridge, 3.5 Classic | 59913075 |
| 04 | Aerator, M24x1, 6 I/min | 59913727 |
| 05 | Fixing set | 1017128V |
| | | |