


57192273 HANSASTELA ECO - Washbasin faucet


EAN: 4057304015199 static.hansa.com/57192273





- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Ø 25 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste



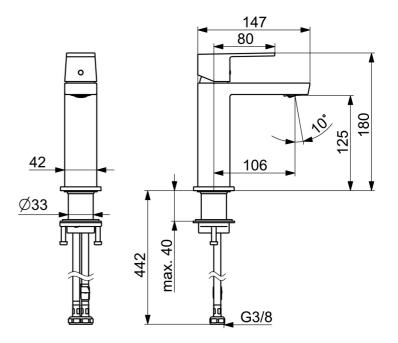




Technical data


Flow properties			
Flow-rate at 3 bar (with flow controller)	4.8 l/min		
Technical properties			
Hot water supply	max. +70°C		
Working pressure	0.5-10 bar		
Connection size	G3/8		
Projection	106 mm		
Backflow prevention (EN1717)	AA		
Material	Brass		
Regulations			
EN standard	EN 817		
Noise class	I (ISO 3822)		
Approvals and Declarations			
ABP	PA-IX 38025/IO		

DoC

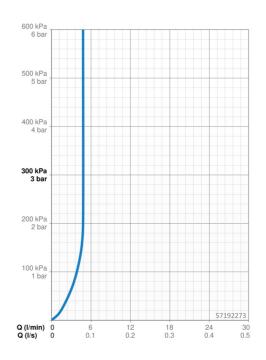

Spare parts

Declaration of conformity

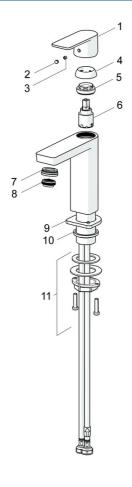

SP57192273

	Name	Code
01	Lever	1006412V
02	Cover plug	59913762
03	Screw, M5x8, SW2.5	59904755
04	Covering cap	59913957
05	Tightening nut, M32x1, SW24	59913958
06	Cartridge, 2.5	59913914
07	Fitting ring for aerator, M24x1, SW17, (2019-)	59914744
80	Aerator, M24x1 HC SSR-STD	59914015
09	Cover flange	1006394V
10	Bottom seal	59914650
11	Fixing set	59913371